


For Earth, For Life
Kubota

DM

KUBOTA
DM SERIES



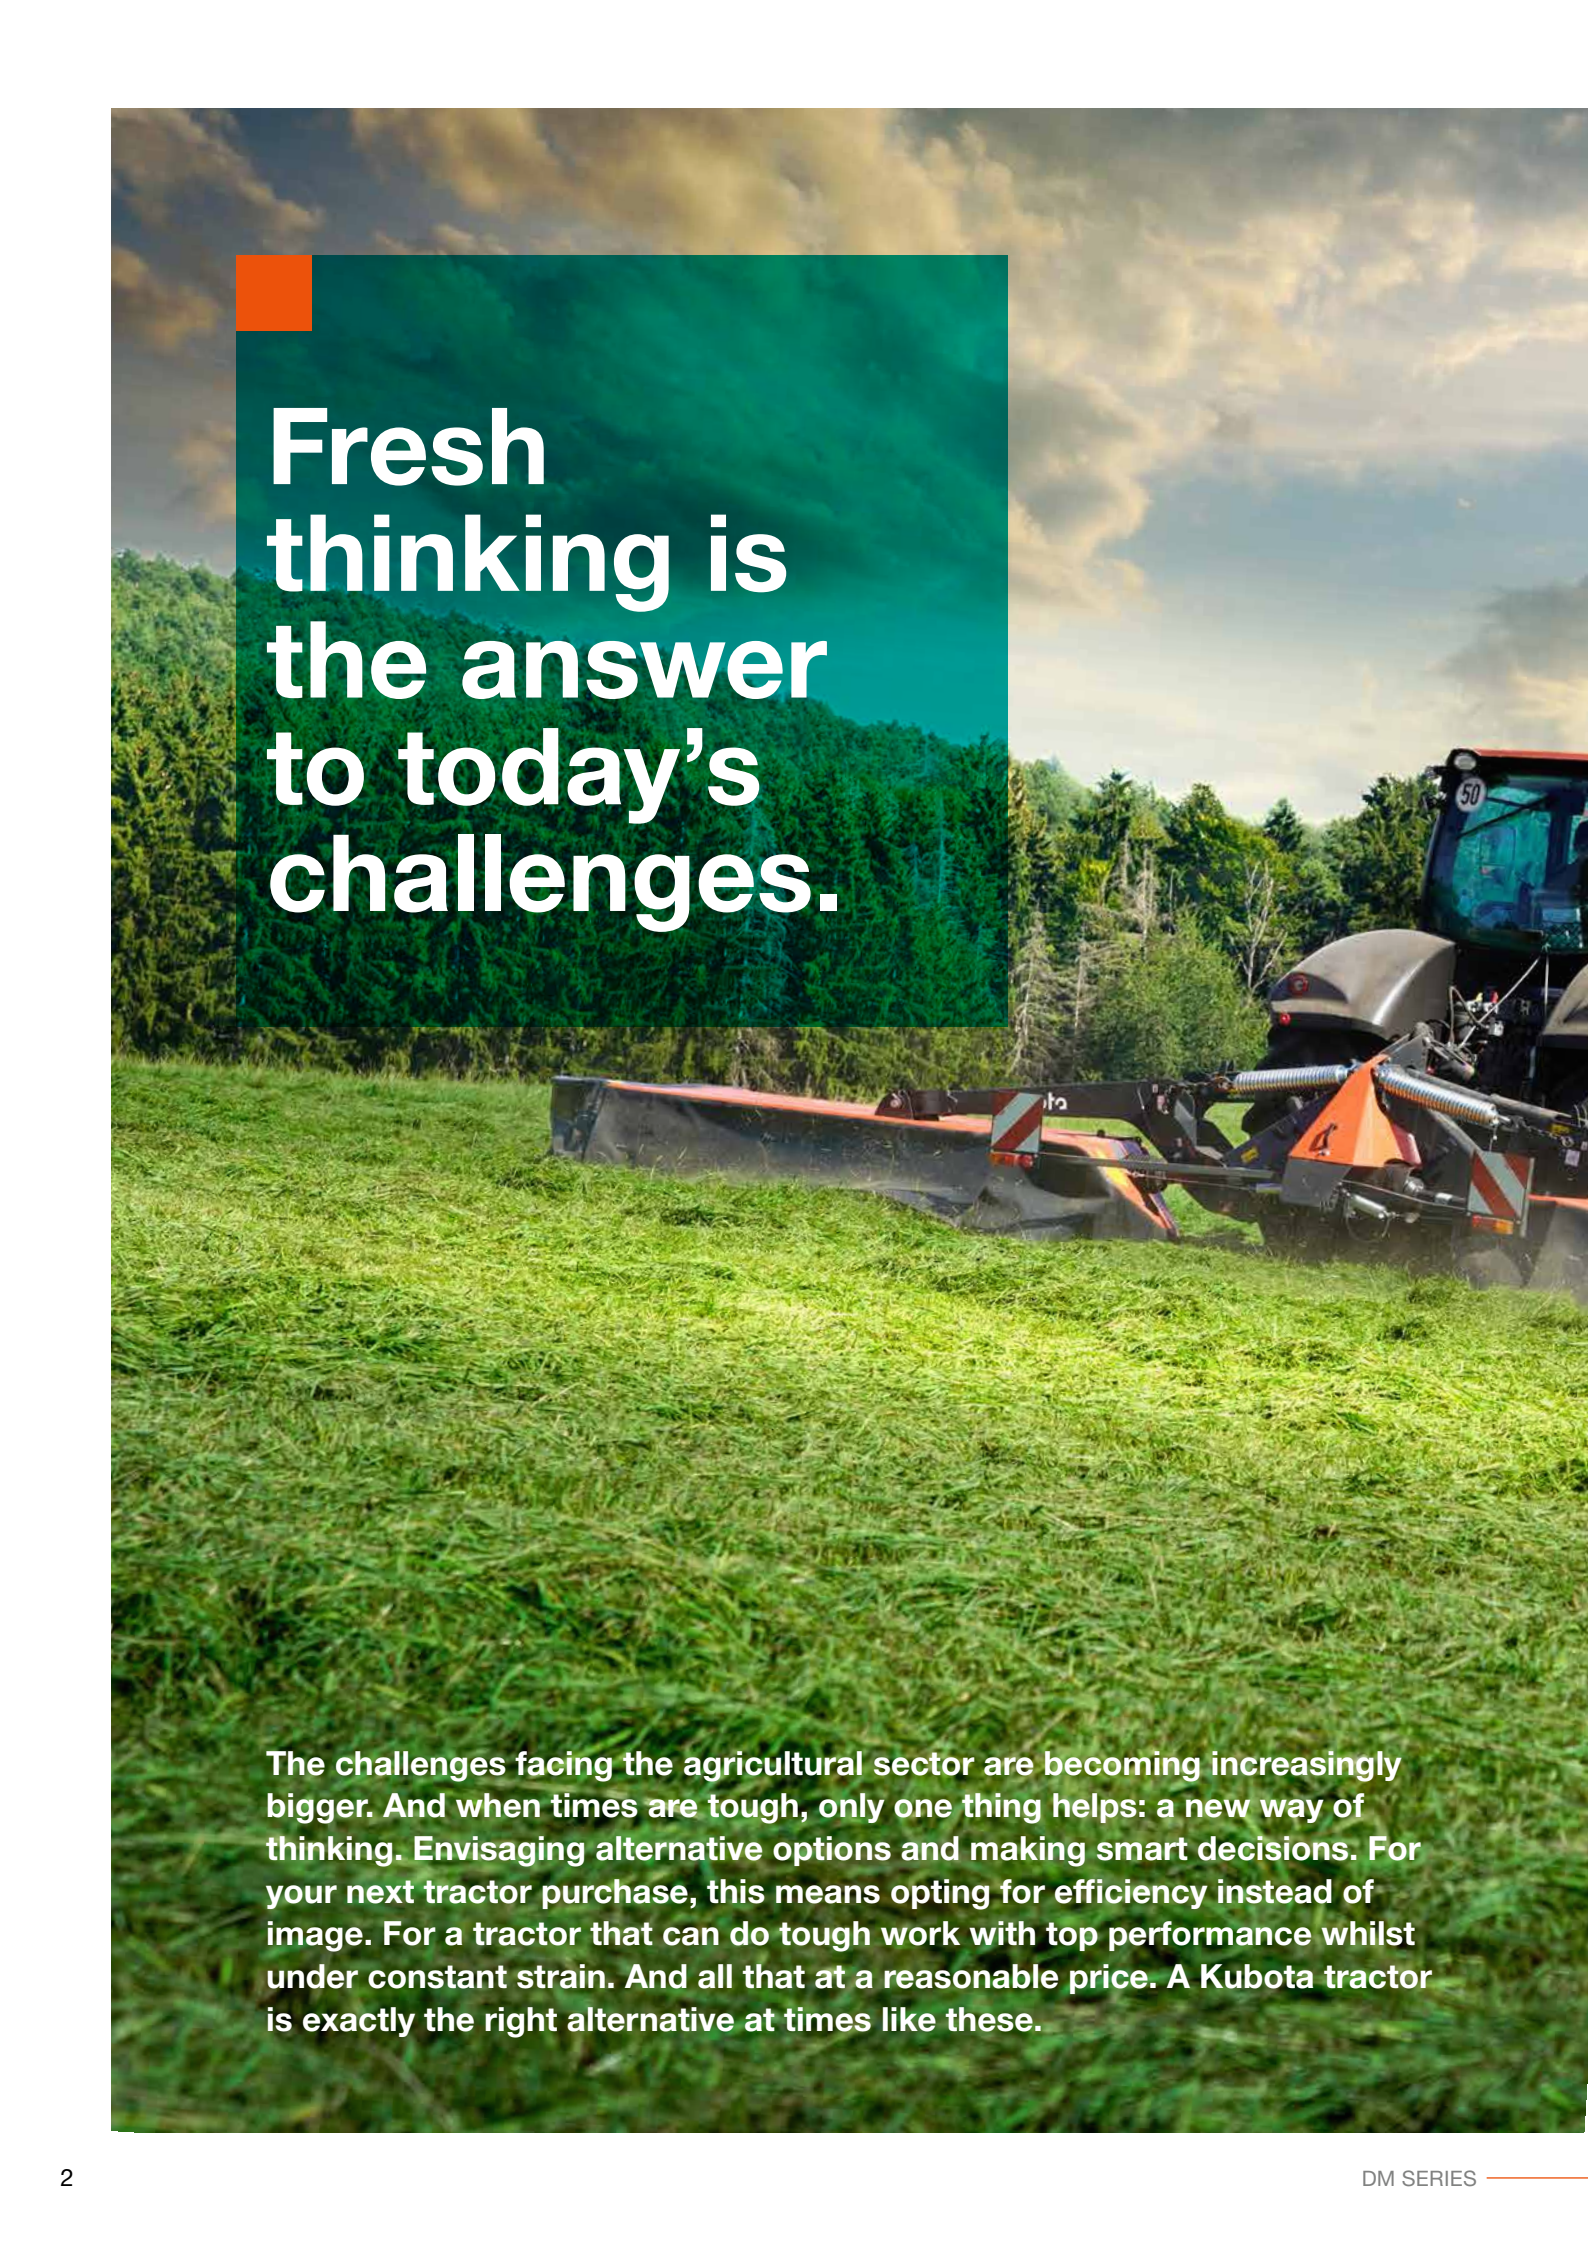

Fresh thinking is the answer to today's challenges.

The challenges facing the agricultural sector are becoming increasingly bigger. And when times are tough, only one thing helps: a new way of thinking. Envisaging alternative options and making smart decisions. For your next tractor purchase, this means opting for efficiency instead of image. For a tractor that can do tough work with top performance whilst under constant strain. And all that at a reasonable price. A Kubota tractor is exactly the right alternative at times like these.





#Highlights

DM1000-4000: Lets you focus on what is important

True performance!

All Kubota disc mowers are built for performance in even the toughest conditions. With a wealth of models, any requirement is covered, to make sure you will be able to make the most of the time available.



DM1000 series

New heavy duty cutterbar. Compact build for smaller tractors and with working widths from 1.7-2.4m.

DM2000 series

Lightweight, simple mowers with a compact but durable design for maximum output. 2.4, 2.8 and 3.2m working width.

DM3000 series

Rear mounted machine with working widths of 2.8-4.0m. The machines can be operated by low horse-power tractors.



DM3087-3095 series

Plain disc mowers with centre suspension and 8.7-9.5m working width, operated by tractors starting from 120hp.

DM3300 series

Centre mounted plain disc mower with a hydraulically suspended design. Working widths of 3.2, 3.6 and 4.0m.

DM4000 series

Outstanding ground following ability, easy operation and low weight are among the highlights of this machine. Working widths of 2.8- 3.6m.



Cutting performance in new dimensions



Triangular discs with 3 blades

Experience better cutting performance. The Kubota cutterbar is fitted with 3 bladed discs. They provide 50% higher cutting frequency for more cuts.

Always counter-rotating discs

All Kubota cutterbars have an even number of counter-rotating discs, meaning discs always work in pairs. This provides generous overlap between all discs and a better crop transport.

Strong and sturdy cutterbar design

The fully welded cutterbar with overlapping C-profiles makes for a rigid and strong design, ensuring high level of durability.

Low noise cutterbar

Low maintenance cutterbar with quiet operation thanks to the specially tooled gear wheels.



Did you know?

Did you know that Kubota produces its own engines and that Kubota is the global market leader for industrial diesel engines under 100 hp? You might be surprised to learn under which bonnets Kubota engines are at work. Top quality and efficiency are the main ingredients of this success.

The Kubota cutterbar is engineered with durability and excellent cutting performance in mind. The fully welded cutterbar is designed for long and demanding workdays with maximum uptime. The triangular disc provides excellent cutting performance, leaving a clean cut stubble.



Always counter-rotating cutting discs for improved overlap

Don't compromise on your cutting performance. All Kubota mowers have an even number of counter-rotating discs, meaning discs always work in pair and turn towards each other. This provides maximum overlap between all discs and a better cut. In addition it efficiently and immediately transports the crop to the rear.

Three-bladed discs for more cuts

Kubota cutterbars, with the triangular shaped discs, are known for their excellent cutting performance. They provide a 50% higher cutting frequency compared to conventional solutions.

With three blades per disc Kubota mowers are constantly cutting. This means a third less load per knife and an even load on the drive and smoother power usage in addition to producing a neat, clean cut stubble.





The cutterbar made to perform


Strong fully welded cutterbar

The Kubota cutterbar provides increased uptime with its fully welded design. The fully welded cutterbar with overlapping C-profiles makes for a very rigid and strong design, ensuring very high level of durability. It is designed for years of hard work.

The low noise cutterbar for comfortable work days

The Kubota cutterbar is renowned for its low noise level during operation. This is thanks to specially tooled gear wheels with round design and long teeth for efficient power transmission – convenient during a long and busy working day.

The long curved gear wheels run smoothly in oil and provide lots of power transmission with little slack. The risk of the gearwheels “catching” on the corners is minimised by the special “round” design, which in turn reduces wear and noise.

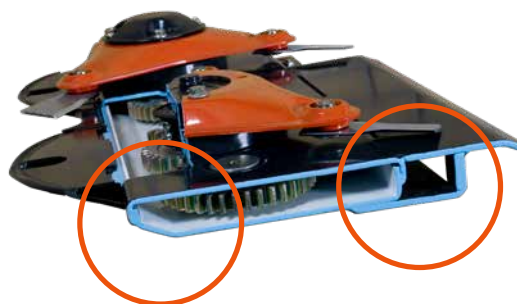

Fully welded cutterbar

Fully welded cutterbar with overlapping C-profile for a strong and durable construction. High oil capacity ensures low working temperature.



Kubota hubs

The hubs provide efficient transfer of power and reduced power consumption.



Low noise cutterbar

Low noise level thanks to specially tooled gear wheels with round design and long teeth for efficient power transmission.



'Express' – easy and quick change of knives

With Express quick change system replacing or turning knives is easily done. All disc mowers in the Kubota range can be fitted with the 'Express' system.




NonStop BreakAway: keeps the cutterbar running

Kubota DM2000, DM3000 and DM3300 series are fitted with the Kubota NonStop BreakAway system to protect the cutterbar. The integrated NonStop BreakAway system is designed to protect the cutterbar from foreign obstacles. Upon striking an obstacle in the field the mowing unit swings backwards and up. This provides maximum protection of the cutterbar. There is no need to stop - or even to reverse the tractor - to get the mowing unit into working position again. When engaged the spring loaded design ensures that the Kubota NonStop BreakAway system automatically returns the cutting unit to its original working position.



Kubota DM2000, DM3000 and DM3300 are fitted with the NonStop BreakAway system.

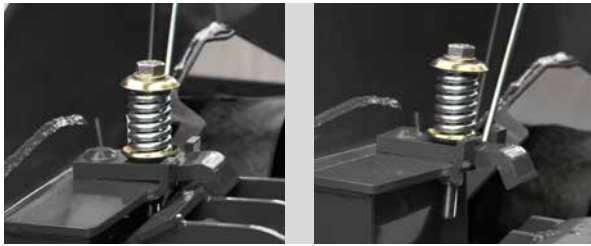

When engaged the spring loaded design ensures that the Kubota NonStop BreakAway system automatically returns the cutting unit to its original working position.





#DM3087-3095

Unmatched: efficient mowing performance paired with low weight

Kubota DM3087 and DM3095, a combination that provides efficient performance with its 8.70 and 9.50m working width paired with a low weight design.

Mow 8.70m with only 120hp


The DM3087-DM3095 is an eco-friendly, energy saving solution purposely built for low operating costs in terms of power and fuel consumption, with power requirements starting at only 120hp. The low weight of only 1315 and 1385kg respectively, together with the ideal weight distribution that butterfly combinations offer, gives the optimum combination of low power requirements, low weight and high efficiency.

Designed to match the needs of large-scale mowing, DM3087 and DM3095 is packed with features to meet these demands. The centre suspended mowing units in combination with the three-bladed discs offer an unmatched mowing performance.

The Kubota NonStop BreakAway solution protects the cutterbar from foreign obstacles, and automatically returns the mowing unit to working position. The Kubota cutterbar offers smooth operation with very low noise level, convenient during a long working day.

Parking, safe and sure-footed

With the new parking device, storage of the DM3087-DM3095 is made easy and convenient, requiring a minimum of space during winter storage. The DM3087-DM3095 is firmly parked on a strong and stable parking foot, bringing total height below 4m.

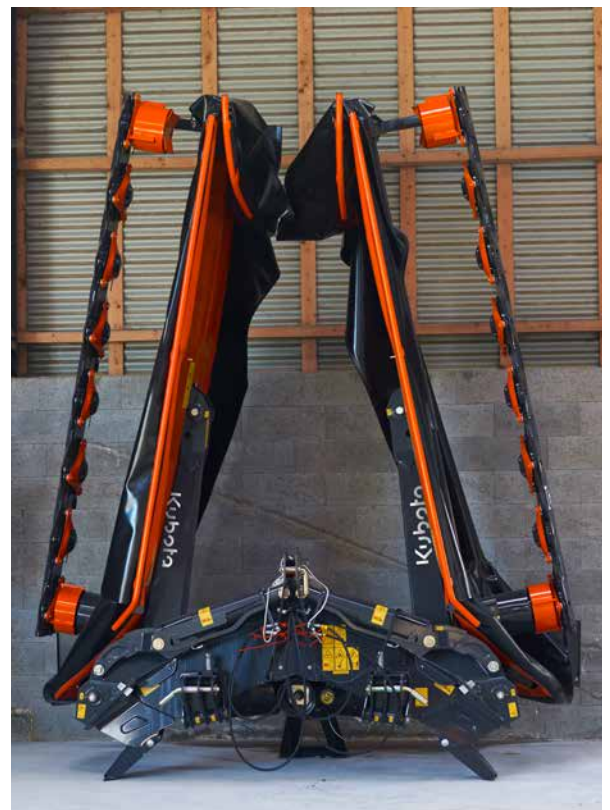



Kubota DM3087-3095 series:

- 8.7-9.5m working width
- Operated by tractors starting from 120hp
- Low weight - low power requirements
- Centre Suspension
- NonStop BreakAway
- Vertical transport position
- Fully welded Kubota cutterbar with triangular discs

Work smarter on the go

This feature provides easy and simple setting of ground pressure on the DM3087 and DM3095. For greater operator comfort, the ground pressure of the spring is set hydraulically from the tractor cab. Easy to adjust, even on the go.

It is in fact a very simple and clever solution to an important challenge in optimizing the mowing job. On the hydraulic version the tension on the large suspension spring, which controls the ground pressure, is adjusted hydraulically, to increase or lower pressure. The chosen ground pressure level is conveniently registered from the easy-to read scale.





#DM3087-3095

Features supporting perfect results

DM3087-DM3095 can be adjusted for optimal operation according to different circumstances, such as field contours or working width of the front mounted mower.

Two mounting options

To ensure optimal overlap between front and rear units, the mowing units can be mounted in two positions on the suspension arm. This also gives you an option of wider overlap in hilly conditions, lessening the need for SideShift equipment.

Vertical transport position

For transport the mower folds into a compact position well behind the tractor. The folding design ensures that the weight is distributed evenly, with the weight of the mower close to the tractor. Endguards are foldable to further limiting transport height, which is below 4.0m and transport width is limited to 3.0m.



Did you know?

Did you know that Kubota is not only one of the top-50 most recognised brands in Japan, but also one of the largest tractor manufacturers in the world? In 2014 alone, Kubota produced more than 180,000 tractors.



Two mounting options.



NonStop BreakAway.



Vertical transport position.



Excellent ground adaptation.



Centre suspension.



Headland turns.

Centre suspension

The mowing units are centre suspended offering an even weight distribution across the complete mower width. Faster and more precise adaptation to ground contours is also achieved due to the centre suspended design. The benefit is less skid wear and optimum protection of the stubble.

NonStop BreakAway system

The Kubota NonStop BreakAway system protects the cutterbar from foreign obstacles. If hitting an obstacle, the BreakAway system will swing the machine backwards and over the obstacle, automatically returning the mower to working position, once the obstacle has been passed.

Excellent ground adaptation

DM3087-DM3095 is fitted with two adjustable ground pressure springs, making setting of the best possible ground pressure easily done, to match the needs of each specific mowing operation.

Headland turns

When turning on headlands the hydraulic cylinder, which is also used when going into transport position, ensures ample clearance to the swath, so they remain undamaged.



#DM3028-3032-3036-3040



Extensive working width: it's all about performance

Kubota DM3000 rear mounted range boasts an extensive working range of 2.8-4.0m, with corresponding weights ranging from 805-950kg, which means the machines can be operated by low horse-powered tractors, making these very attractive machines for farmers with smaller tractors, who still needs to cut substantial areas. Paired with the DM4028 or DM4032 front mounted machine the joint working width is up to an amazing 6.8m.



Parking stand for easy and compact storage (optional).



Kubota DM3028-3032-3036-3040:

- 2.8-3.2-3.5-4.0m working width
- Centre suspension
- Up to 125° vertical transport solution
- NonStop BreakAway
- 540/1000 rpm gearbox
- Fully welded Kubota cutterbar with triangular discs



The centre suspended design enables fast and precise adaptation to ground contours.



The large compensating spring ensures excellent flotation across the full mower width.

Centre pivot suspension

The DM3000 series is centre suspended to give an even weight distribution across the complete mower width. Faster and more precise adaptation to ground contours is also achieved because of the centre suspended design. The benefit is less skid wear and optimum protection of the stubble.

Clean cutting performance

The latest generation of the Kubota cutterbar is fitted to these machines, offering unmatched cutting performance thanks to the triangular three-bladed discs.

The large compensating spring in combination with the centre mounted design provides perfect flotation of the complete cutterbar.

Work smarter on the go

This feature provides easy and simple setting of ground pressure on the Kubota DM3000 series. For greater operator comfort ground pressure of the large suspension spring is set hydraulically from the tractor cab. Easy to adjust, even on the go.

It is in fact a very simple and clever solution to an important challenge in optimizing the mowing job. On the hydraulic version the tension on the large suspension spring, which controls the ground pressure, is adjusted hydraulically, to increase or lower pressure. The chosen ground pressure level is conveniently registered from the easy-to-read scale.

Accurate setting of ground pressure adds to significantly better working result and reduction of fuel consumption, as a mower with correct ground pressure is easier to pull, requiring less power and fuel.



Did you know?

Did you know that our parts are manufactured to the same high standards and strict specifications as the Kubota machines? Genuine parts will always work and fit as intended, and are guaranteed to keep your machine running at maximum performance.



When encountering an obstacle the NonStop Break-Away system protects the cutterbar by swinging it back and up.



Two mounting options for optimal overlap with a front mounted machine.



These machines can be operated with either 540 or 1000 rpm without additional accessory.



To avoid driving on mown grass, a swath forming kit is optionally available for 3036 and 3040.

Amazingly uncomplicated

The linkage pins on DM3000 series can be adjusted for four different positions, ensuring compatibility with any tractor. Another advantage is that the overlap in combination with a front mounted machine like DM4028 or DM4032 can be optimized, to ensure that the complete working width on both machines is utilized. Furthermore the mowing unit can be mounted in two different positions on the suspension for easy setting of optimal overlap.

Vertical transport position

These DM3000 series machines are folded hydraulically into a vertical transport position up to 125° depending on model. The low gravity point ensures excellent weight distribution, with the weight of the mower close to the tractor.

NonStop BreakAway system

To offer maximum protection of the cutterbar, DM3000 series machines are fitted with the Kubota NonStop BreakAway solution. When encountering an obstacle the BreakAway will swing the machine backwards and over the obstacle, returning to its original working position, once the obstacle has been passed.

Adjustable PTO speed

Kubota DM3000 series come factory fitted with the option of being operated with either 540 or 1000 rpm. It requires no additional accessory. All that is needed is simply to turn the main gearbox on the suspension 180°.

Lift on headlands

Lifting on headlands is easily done without activating the 3-point linkage of the tractor. A hydraulic cylinder is used for lifting on headlands and turning is simple thanks to sufficient ground clearance. The same cylinder is used when going into transport position.



Up to 125° vertical transport position for excellent weight distribution.



Lifting on headlands via hydraulic cylinder – ample ground clearance.



#DM4028-4032-4032S-4036



Remarkable adaptation range: progressive suspension design

DM4000 and DM4000S series machines are exceptionally well adapted to varying field conditions and contours. At standard settings the cutterbar has a remarkable 430mm upwards and 210mm downwards adaptation range, in combination with a transverse pivoting range of 17°. This wide spectrum allows the machine to follow the ground in all conditions without overloading the cutterbar.



The mowing unit moves independently from the front linkage, ensuring the best possible pattern of movement and the transverse adaptation sets the standard in this segment.

Unrestricted movement

There is no wearing on the front linkage of the tractor, as the integrated suspension design does not require a flexible front linkage - the relative movements are done by the machine itself. This also means that you are not restricted by the limited flexibility typically originating from the front linkage.

Easy operation of the machine

Correct setting of the machine is very user-friendly. The front linkage is set to a specified height and the mower unit is operated by a separate hydraulic cylinder integrated in the suspension. Ground pressure is provided by two springs and cutting quality is always excellent due to Kubota's three-bladed discs.



A BreakAway solution, integrated in the headstock, helps clear obstacles.

Kubota ground following system



An adaptation range of 430mm upwards and 210mm downwards ensures untroubled ground following.



#DM4028-4032-4036



Optimised performance – intuitive handling

Kubota DM4000 series is engineered to excel in the toughest environments, featuring a highly responsive suspension concept that ensures dependable performance during everyday operation.

Refined for superior output

All performance optimizing adjustments are simple and intuitively done on the DM4000 range. It offers a compact design that easily connects to the tractor linkage without the need for an additional A-frame. Counter-rotating discs ensure that cutting quality remains outstanding, encouraging rapid regrowth from clean stubbles.

In working widths of 2.8, 3.2 and 3.6m these machines have excellent ground following ability, easy and intuitive operation and a compact design making them the ideal solution for even demanding mowing jobs. It is the perfect mower to go into several combinations with rear mounted mowers and loader wagons.



Excellent service access to the cutterbar, which is an advantage compared to most other machines with a flexible suspension. Even when the machine is raised, you can open the entire front cover.

Responsive mowing

The very responsive kinematics associated with the headstock design will step in when encountering even the smallest obstacles during operation. To offer maximum protection and lessen the shock loads on the complete machine, the cutterbar will move backwards and up, letting any obstacle pass without risk of damage.

Two-Speed driveline

DM4000 series comes with a two-speed driveline with simple adjustment of PTO speed from the standard setting of 1000rpm. By switching driveline pulleys, PTO speed can be changed to 750rpm for reduced fuel consumption or when using the mower for summer feeding in combination with a loader wagon



Direct coupling to tractor – no additional A-frame needed.



Good view of the machine from the tractor cabin. Road mirrors available as option.



Quick and easy access to V-belts.



Belt tensioner is easily accessible for checking and adjustment.



#DM4032S-4032S Compact



DM4032S Compact

It features a compact headstock that brings mower and gravity point closer to tractor. The headstock is positioned right behind the auger. This is especially appreciated when using smaller tractors in hilly terrains or entering narrow buildings where you want to keep tractor and mower as closely together as possible to stay in control.

- Working width: 3.2m
- Power Requirements: 45hp/33kW
- Distance, linkage to cutterbar: 70cm



DM4032 / DM4032S

These models come with a responsive suspension concept and accurately follows uneven ground contours. It is the ideal solution for large acre mowing job and goes well onto standard tractors. Perfectly suited for combination mowing with a rear mounted mower or a loader wagon.

- Working width: 3.2m
- Power Requirements: 40-45hp/29-33kW
- Distance, linkage to cutterbar: 100cm

Reconceptualizing swathing


Kubota DM4000S is our most versatile front mower. It is designed for both narrow swathing and widespreading and features the innovative auger technology that efficiently merges crop into narrow swaths. It comes in two versions both sharing the auger platform.

Efficient crop merging down to 1m

The Kubota DM4032S is a 3.2m front mounted plain mower that offers an efficient solution for narrow swathing with a front mower. It includes an actively driven swath former, designed for both narrow swathing and wide spreading. It collects the crops based on the Kubota auger system and is developed for a broad range of applications. In combination with rear mounted mowers, as a single machine, or joined up with a loader wagon for zero grazing. With widths as narrow as 1.00m, the swaths will pass between the wheels of even smaller tractors, leaving an untouched swath that is picked up easily by the loader wagon.

Solutions for any application

The auger is an efficient solution for crop collection with a minimum of soil contamination. The auger is positioned right behind the cutterbar and guides the crops to the centre. The crop is cut and placed in an airy, fluffy swath, not flat on the ground, like with a typical plain front mower. This means it is easier to pick up the crop with a minimum of crop losses.

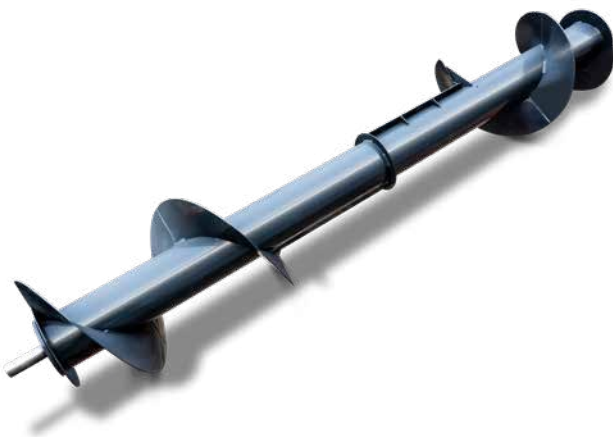

The advantages

- Adjustable swath width of 1.0m, 1.15m and 1.30m.
- Flexibility to suit a variety of mowing applications.
- Crop is not touching the ground when being merged, reducing risk of soil contamination.
- Crop is placed in an airy box shaped swath – increasing dry down time.
- Low horsepower solution.



#DM4032S-4032S Compact



With the option of 3 different swath widths (1.00, 1.15 and 1.30m) and wide spreading up to 2.20m, DM4032S models offer exactly the flexibility that most farmers are looking for.

One solution: for every mowing job

Flexible swathing for increased usability

Kubota DM4000S is designed to maximize uptime of the mower and is customized for a number of mowing jobs. It is able to place swaths of variable widths of 1.0m, 1.15m and 1.30 to customize swath width to current requirement. This is easy set by adjusting the crop guide wings. To offer full flexibility the crop guide wings can be fully removed to offer wide spreading of 2.2m.

Is this way Kubota DM4000S is designed to go into a number of applications. The narrow swathing of 1m or 1.15m makes it an ideal partner for direct pick-up with a loader wagons.

Remove the crop guide wings in less than 5 minutes and you have the ideal solution for hay making in combination with a rear mounted mower.



Crop is placed in an airy box shaped swath increasing dry down time.

Preparing a clean and airy swath

The actively driven auger guides even high volumes of crop towards the centre of the mower, leaving a nice, box-shaped swath. Crop is immediately moved away from the discs, inviting for excellent cutting performance.

Each side of the auger is working in combination with a guide plate that efficiently transports the crop to the middle, without any crop loss or contamination often seen from systems applying swath wheels. Kubota DM4000S does not just move two swaths next to each other like traditional drum mowers, but places the crop into one even and airy swath, speeding up the drying process.



Crop is guided towards the centre by auger and closed guide plates.



For widespreading the boards are released and positioned on top of the mower.



Smart agility: efficient fuel use

Fuel efficient solution

DM4000S is driven from the top by a simple but efficient driveline, which means that only 5hp is needed to run the auger. In total the auger, including driveline, adds approximately 150kg to the mower.

Adjustable swath width

The adjustable swath width allows you to set the correct width in accordance with crop and weather conditions. As the crop is drying during a long day of mowing, the swath width can be adjusted from being narrow at the start of the day to being wider during the day, to ensure correct and even moisture level in the crop.



Did you know?

Did you know that Kubota manufactures products in seven European countries? This proximity to the market is central to the company's philosophy. Each factory adheres to the same high Japanese quality standards, whether it is located in Germany, France, or Japan.



DM4032S Compact with gravity point close to the tractor is an important feature when operating in hilly conditions with smaller tractors.



Integrated tool box is standard.



Narrow transport position with good visibility. Hydraulic foldable guards are available as option.



Excellent visibility during transport. Optional front mirror kit available.



#DM3332-3336-3340

Improved ground adaptation: high output

Kubota offers a centre mounted plain disc mower with a hydraulically suspended design in three working widths of 3.2, 3.5 and 4.0m. All DM3300 models are fitted with the fully welded Kubota cutterbar, with an even number of counter-rotating discs for a wider overlap, and excellent cutting results in all conditions. Special efforts have been made to make daily operation as easy, straightforward and effective as possible.



Obvious advantages

The machines are suspended in the centre of gravity offering several advantages. The advantages include equal ground pressure and fast adaptation to varying field contours. These features facilitate a cleaner cut, better protection of the stubble and in addition an improved fuel economy, as well as less skid wear.

NonStop BreakAway

The DM3300 series is fitted with an automatic NonStop BreakAway system to protect the cutterbar. If an obstruction is hit in the field, the mowing section will swing backwards and up. This gives maximum protection of the cutterbar. There is no need to stop - or to reverse the tractor, to get the mowing unit into working position again - the cutting section will automatically return to its original working position.

Excellent power transmission

DM3300 series machines are equipped with a direct drive system from the gearbox to the first disc. This ensures an efficient power transmission and allows you to take full advantage of the whole width of the cutterbar.

To avoid driving on mown crop, a swath forming kit is optionally available for DM3336 and DM3340.



For transport the mower is swung hydraulically into horizontal position behind the tractor. Fast and easy conversion, with no need to leave the tractor.



Direct drive from the gearbox to the first disc for efficient power transmission.



NonStop BreakAway.



Kubota DM3332-3336-3340:

- 3.2-3.5-4.0m working width.
- Hydraulic suspension
- Centre suspension for even weight distribution and quick reactions to changes in contours.
- Integrated NonStop BreakAway system protecting the cutterbar.
- 15° upwards and downwards mowing operation range.
- Fully welded Kubota cutterbar with triangular discs.

Hydraulic suspension

The DM3300 range is designed with a hydraulic suspension that offers improved ground adaptation. The ground pressure of the mowing unit is easily adjusted, to allow adaptation to varying field conditions, ensuring an even cutting height. The ground pressure is continuously and quickly adaptable, by using the lever on the suspension.

Superb ground adaptation

The perfect ground pressure is set using a two-chamber hydraulic cylinder and a hydraulic valve. The current ground pressure is indicated on the manometer, which is mounted on the machine.

Flexible mowing on slopes

The design of the suspension, with an extra pivoting point, allows greater flexibility in the working range, enabling mower operation at 15° upward or downward angles. This offers great advantages when working on hillsides or along ditches, and also makes it easier to manoeuvre the machine on headlands.

Easy lift on headland

DM3300 series is easily done via a hydraulic cylinder, which means there is no need to activate the tractors 3pt linkage. As the PTO stays in the same position, vibrations in the transmission are eliminated, implying less wear on tractor and machine.



Centre mounted suspension for even weight distribution and fast adaptation to ground contours.



Hydraulic setting of ground pressure.



#DM2024-2028-2032

Excellent price to output ratio

The Kubota DM2000 models are lightweight, simple mowers with a compact but durable design, for maximum output at a competitive price. They are offered in working widths of 2.4, 2.8 and 3.2m. The Kubota cutterbar with triangular discs ensures continuous, high-quality cutting performance, especially in difficult crop conditions.

Powerful drive

The mowers are equipped with a powerful and flexible spring loaded V-belt drive. As the belt loosens, the spring pushes the drive wheel outwards, automatically tensioning the belt.

Flexible suspension

Kubota DM2000 models offer a very flexible suspension, ensuring optimal ground contour following. Due to the flexible suspension, the mowers are exceptionally well suited for work on slopes and in hilly conditions, with an operating angle of 35° up and down.


Kubota DM2024-2028-2032:

- 2.4-2.8-3.2m working width.
- Mowing on slopes +/- 35°.
- NonStop BreakAway.
- Spring loaded V-belt drive.
- Easy setting of ground pressure.
- Fully welded Kubota cutterbar with triangular discs.



Swath disc is available as option.



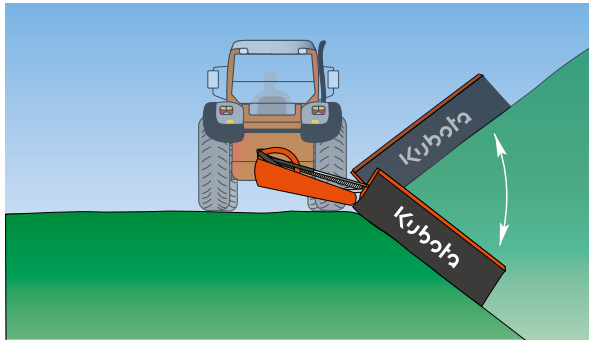

Kubota DM2000 series can pivot 35° up and down without any adjustment.



Four v-belts ensure excellent transfer of power.



Lift on headlands via a hydraulic cylinder – no use of the 3-pt hitch is needed.



The linkage pins are easily adjusted to match the tractor width, which enables the mower to cut to its' full working width.



For transport the machine is folded hydraulically from the tractor cab to the vertical transport position well behind the tractor, ensuring a stable and steady transport.



#DM1017-1022-1024



Productivity in a simple package

The new Kubota DM1000 series features a new heavy duty Kubota cutterbar, which is designed for low maintenance and quiet operation. The fully welded cutterbar with overlapping C-channels has a rigid and sturdy construction, ensuring a very high level of durability. The Kubota cutterbar has a high oil capacity, ensuring a low working temperature. The long curved gear wheels run smoothly in oil and provide optimal power transmission with little slack.



Spring loaded BreakAway

When an obstacle is encountered, the mower swings backwards to protect the cutterbar. By reversing the mower is reset into working position.



Kubota DM1017 - 1.7m working width.

Fast lifting on headland

The mower is easily lifted via a hydraulic cylinder without activating the tractor's 3pt linkage. The advantage is less wear on tractor and machine, as the PTO stays in the same position, minimizing vibrations in the transmission.



Kubota DM1022 – 2.2m working width.

Transport solution

When in transport, the mowers are folded to a vertical position well behind the tractor. The center of gravity is close to the tractor, which ensures excellent weight distribution and transport stability.



Kubota DM1024 – 2.4m working width.



Easy lift on headland.



Spring loaded BreakAway.



Safe and narrow transport solution. It is not necessary to raise the tarp for transport position. Just fold & go!



Hitch is very easy to attach.

Kubota Farm Solutions: 360° performance for 100% success

We understand that you need more than powerful tractors and implements to succeed: namely, an integrated system of products and services to increase your competitiveness and preparation for the future. With Kubota Farm Solutions (KFS), we have brought together our solutions in a system— and targeted our proposition to you. From intelligent technology to individual services, the KFS advantages complement each other, forming a circle that ends where it begins: with our commitment to support you a little better every time, now and in the future.





Performance

You have a clear objective: to get your work done productively and successfully while being relaxed. Kubota offers you the equipment that can best support you in this endeavour. Whichever tractor or implements you decide on, you can always count on proven quality, excellent performance, and co-ordinated features. In short: intelligent and reliable technology that gets you a decisive step closer to your goal.



Control

You want full control over what you are doing. Kubota provides you with perfectly integrated systems to help you achieve that. From machine optimisation to implement monitoring, you can control the tractor and resources easily from a single terminal. This not only provides you with a better overview of all work processes, but also allows you to work without stress.



Optimisation

You know exactly how you want to get your work done: efficiently, precisely, and most comfortably. Kubota gives you everything you need to obtain optimal results while remaining at ease. With our ISOBUS technology, precision farming solutions, and automatic steering system, you can apply seeds, fertilisers, and pesticides with extreme precision. This lowers your costs and reduces your workload.



Value protection

You know what it takes to be commercially successful: top performance with every task and top conditions over many years. Once again, Kubota offers solutions that fulfil what they promise. Our parts are manufactured to the same high standards and strict specifications as the Kubota machines.



Finance management

You want to improve your productivity, but not at any cost. With Kubota Finance, you can make your planned investment with ease, convenience, and safety. Whether financing or leasing, you benefit from professional advice and attractive conditions. All you need in order to gain the advantages of a technology that drives your success forward. Whether you need machines or services, you have full control of the costs.

Technical data

Model		DM1017	DM1022	DM1024	DM2024	DM2028	DM2032
Dimensions & weight							
Cutting width	(m)	1.7	2.2	2.4	2.4	2.8	3.2
Weight, approx	(kg)	395	455	470	605	665	680
Transport width	(m)	1.2	1.2	1.2	1.4	1.4	1.4
Transport height	(m)	-	-	-	-	-	-
Attachment to tractor							
Hitch	(CAT)	2	2	2	2	2	2
PTO	(RPM)	540	540	540	540	540	540
Min. PTO horsepower req.	(kW/hp)	26/36	31/42	34/46	33/45	37/50	40/55
Operation							
Number of discs/knives		4/12	6/18	6/18	6/18	8/24	8/24
Number of hydraulic outlets		1S	1S	1S	1S	1S	1S
Mowing angle °		-45/+15	-45/+15	-45/+15	-35/+35	-35/+35	-35/+35
Stubble height	(mm)	30-60	30-60	30-60	30-60	30-60	30-60
Other Features							
BreakAway		●	●	●	-	-	-
NonStop BreakAway		-	-	-	●	●	●
Overrun clutch		●	●	●	●	●	●
Friction clutch		-	-	-	-	-	-
Equipment							
Swath boards (RH / LH)		● / -	● / -	● / -	○ / ○	○ / ○	○ / ○
Swath discs (RH / LH)		○ / -	○ / -	○ / -	○ / -	○ / -	○ / -
High skids +20/+40/+80mm		○ / ○ / ○	○ / ○ / ○	○ / ○ / ○	○ / ○ / ○	○ / ○ / ○	○ / ○ / ○
Lighting kit		○	○	○	○	○	○
Hydraulic ground pressure adj.		-	-	-	-	-	-
Swath forming kit		-	-	-	-	-	-

Model		DM3332	DM3336	DM3340	DM4028	DM4032	DM4032S
Dimensions & weight							
Cutting width	(m)	3.2	3.5	4.0	2.8	3.2	3.2
Weight, approx	(kg)	805	1040	1060	790	815	930
Transport width	(m)	<3.0	<3.0	<3.0	2.6	3.0	3.0
Attachment to tractor							
Hitch	(CAT)	2	2	2	2	2	2
PTO	(RPM)	540	1000	1000	750/1000	750/1000	750/1000
Min. PTO horsepower req.	(kW/hp)	40/55	44/60	50/70*	26/35	29/40	33/45
Operation							
Number of discs/knives		8/24	10/30	10/30	8/24	8/24	8/24
Number of hydraulic outlets		1D	1D	1D	1S	1S	1S
Mowing angle °		-15/+15	-15/+15	-15/+15	-17/+17	-17/+17	-17/+17
Stubble height	(mm)	30-60	30-60	30-60	30-60	30-60	30-60
Other Features							
BreakAway		-	-	-	-	-	-
NonStop BreakAway		●	●	●	●	●	●
Overrun clutch		●	●	●	●	●	●
Friction clutch		●	●	●	-	-	-
Equipment							
Hydr. ground pressure setting		-	-	-	-	-	-
Swath boards (RH / LH)		- / -	- / -	- / -	- / -	- / -	- / -
Swath discs (RH / LH)		● / ○	● / ○	○ / ○	○ / ○	○ / ○	○ / ○
High skids +20/+40/+80mm		○ / ○ / ○	○ / ○ / ○	○ / ○ / ○	○ / ○ / ○	○ / ○ / ○	○ / ○ / ○
Lighting kit		○	○	○	○	○	○
Swath forming kit		-	○	○	-	-	-

* Minimum weight requirement on tractor - not available ○ option ● standard

DM3028	DM3032	DM3036	DM3040	DM3087	DM3095		
2.8	3.2	3.5	4.0	8.7	9.5		
805	875	910	950	1315	1385		
2.3	2.3	2.3	2.3	<3.0	<3.0		
2.8	3.3	3.7	3.7	<4.0	<4.0		
2/3	2/3	2/3	2/3	2/3	2/3		
540/1000	540/1000	540/1000	540/1000	1000	1000		
37/50	40/55	44/60	51/70	88/120	110/150		
8/24	8/24	10/30	10/30	16/48	20/60		
1S	1S	1S	1S	2D	2D		
-15/+15	-15/+15	-15/+15	-15/+15	-15/+15	-15/+15		
30-60	30-6	30-60	30-60	30-60	30-60		
-	-	-	-	-	-		
●	●	●	●	●	●		
●	●	●	●	●	●		
●	●	●	●	●	●		
- / -	- / -	- / -	- / -	- / -	- / -		
● / ○	● / ○	● / ○	● / ○	○ / ○	○ / ○		
○ / ○ / ○	○ / ○ / ○	○ / ○ / ○	○ / ○ / ○	○ / ○ / ○	○ / ○ / ○		
○	○	○	○	○	○		
○	○	○	○	○	○		
-	-	○	○	-	-		

DM4032S Compact	DM4036						
3.2	3.5						
890	900						
3.0	3.4						
2	2						
750/1000	750/1000						
33/45	37/50						
8/24	10/30						
-	1S						
-16/+16	-17/+17						
30-60	30-60						
-	-						
●	●						
●	●						
-	-						
-	○						
- / -	○ / ○						
-	○						
○ / ○ / ○	○ / ○ / ○						
○	○						
-	-						

The company reserves the right to change the above specifications without notice. This brochure is for descriptive purpose only. Some of the items pictured in this brochure are optional and not standard equipment. Please consult your local Kubota dealer for warranty, safety or product information. For your safety, Kubota strongly recommend the use of a seat belt in all applications.

© = trade mark protection in the EU. ©2025 Kverneland Group Kerteminde AS

The Kubota logo is displayed in a teal color. It features the word "Kubota" in a stylized, rounded font. The letter 'K' is particularly large and bold, with a unique shape where the top bar is slightly curved. The 'u' and 'o' are also rounded, and the 't' has a distinctive shape with a curved top. The 'a' is simple and rounded.